



ALUMINIUM CLADDING ALLOY 1060

- COLD INSULATION
- HOT INSULATION
- ACOUSTIC INSULATION

Contact Address;
3, Classon Close, West Drayton
Middlesex, United Kingdom
Telephone no.: +44 2038806009
Fax no.: +44 2038808009
Email: sales@dynamicthermal.com

Save Heat
Energy
Save
Save




Aluminium Cladding Alloy 1060

Aluminium sheet Alloy 1060 supplied by DYNAMIC THERMAL SOLUTIONS is commercial grade aluminium sheet for the cladding work on pipes and equipment items.

Aluminium Sheet has excellent corrosion resistance and high strength to weight ratio.

TYPE

- Flat Sheet
- Corrugated Sheet (5mm Corrugation)

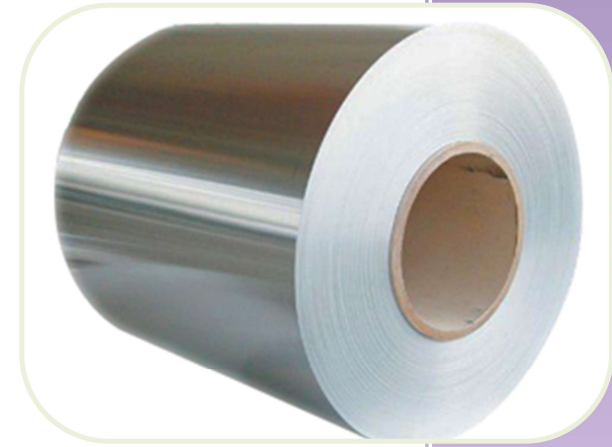

INSPECTION & TESTING

- ASTM B209 / EN standards
- Mill Test Report

STORAGE

Aluminium coil shall be stored in dry and ventilated warehouse.

PACKING

Packed in Coils on Wooden pallets suitable for containerised shipment

FINISH

- Smooth
- Stucco Embossed

ADVANTAGES

- Better Corrosion Resistance
- Better Mechanical Property

APPLICATION

- Pipe and Fitting Cladding
- Equipment Cladding
- Vessel & Tank Cladding

MOISTURE BARRIER

FACTORY APPLIED

- Kraft Paper
- Polysurlyn

Temper	H-14
Standard	ASTM B209
Emissivity	0.1
Width	1000 mm
Thickness	0.6, 0.8, 1.0, mm
Coil Weight	2 tons approx.